

Skyline Energy – Ecological Solutions

Solar Electricity, Solar Hot Water, Heat-Pumps, and Hydronic Heating


Model SX-13CCZA – Cold Climate Hydrocarbon Heat Pump

Ideal for hydronic heating systems - even where overnight temperatures fall below freezing.

Specifications: Model SX-13CCZA

Voltage / Phase	240v 50Hz/ 1Phase
Power input range	2kW-3kW
Suitable floor area for slab heating	Up to 130sqm Approx. ¹
Suitable floor area for panel heating	Up to 100sqm Approx ¹
Working air temp range	-19°C - +45°C
Compressor (Copeland)	ZR34K3E-PFJ-522
Refrigerant	Hydrocarbons
Zeihl Abegg “OWLET” Fans	FN045-6EK.4F.V79P1, 450mm, 190W, 4000+m3/hr (each)
inlet/outlet connections diameter	25mm
Recommended Primary Circ Pump	GPD32-9/25-16
Maximum Outlet Water Temp	55°C
Noise Level @ 3 metres	<55dBa
Defrost	reverse cycle
Cabinet Construction	Mild Steel
Dimensions (mm)	1120L x 650W x 1270H
Weight – empty	160Kg
Warranty (from 2017 onward)	3yrs ²

SX-13CCZA model uses Ziehl-Abegg “OWL” fans for improved airflow, higher efficiency and quieter operation – especially recommended for home heating where sound-level could be an issue.

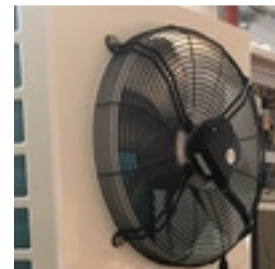

- Operates in cold climates
- Ziehl-Abegg “Owlet” fans
Quiet yet powerful
- Economical to operate
- Electric- so running costs can be offset with Solar Electricity



Unit specifications subject to change without notice

1. SIZING IS FOR NEW 5-STAR THERMAL EFFICIENCY BELOW 500m ALTITUDE - CALL FOR FURTHER SIZING INFORMATION
2. Subject to suppliers sizing and installation guidelines being followed (there may be a travel charge for on-site service if there is a significant distance)

HEATING THE NATURAL WAY

A Cold Climate Air Sourced Hydronic Heat Pump uniquely extracts solar heat energy found abundant in the in air and transfers it to water.

Our Air Sourced Hydronic Heat Pump technology has a vast potential for harnessing renewable energy, they extract heat from the air and concentrate it to provide hot water for heating homes and commercial buildings. The only energy required is that which is used to concentrate the thermal energy – so the system can provide a heat output up to four times larger than the energy input. Because they don't rely on direct sunlight radiation, they can operate in all seasons of the year, under all conditions; shade, overcast, sun, rain, frost, even at night.

The SX-13CCZA models are fitted with state-of-the-art Zeihl Abegg FN045-6EK.4F.V79P1, 450mm, 190W, 4000m³/hr (each) “OWLET” fans, significantly reducing noise levels and providing greater overall efficiency.

Used in conjunction with good building practices such as good insulation, passive solar design, hydronic heating with our state of the art, correctly sized heat pumps can be an economical and ecological, wise investment.

... “let us exceed your expectations”

1300 552 976


website: www.skylineenergy.com.au

email: info@skylineenergy.com.au

Skyline Energy – Ecological Solutions

Solar Electricity, Solar Hot Water, Heat-Pumps, and Hydronic Heating

Model SX-13CCZA Hydrocarbon Hydronic Heatpump Performance Chart - C.O.P. includes 300W primary circ pump:

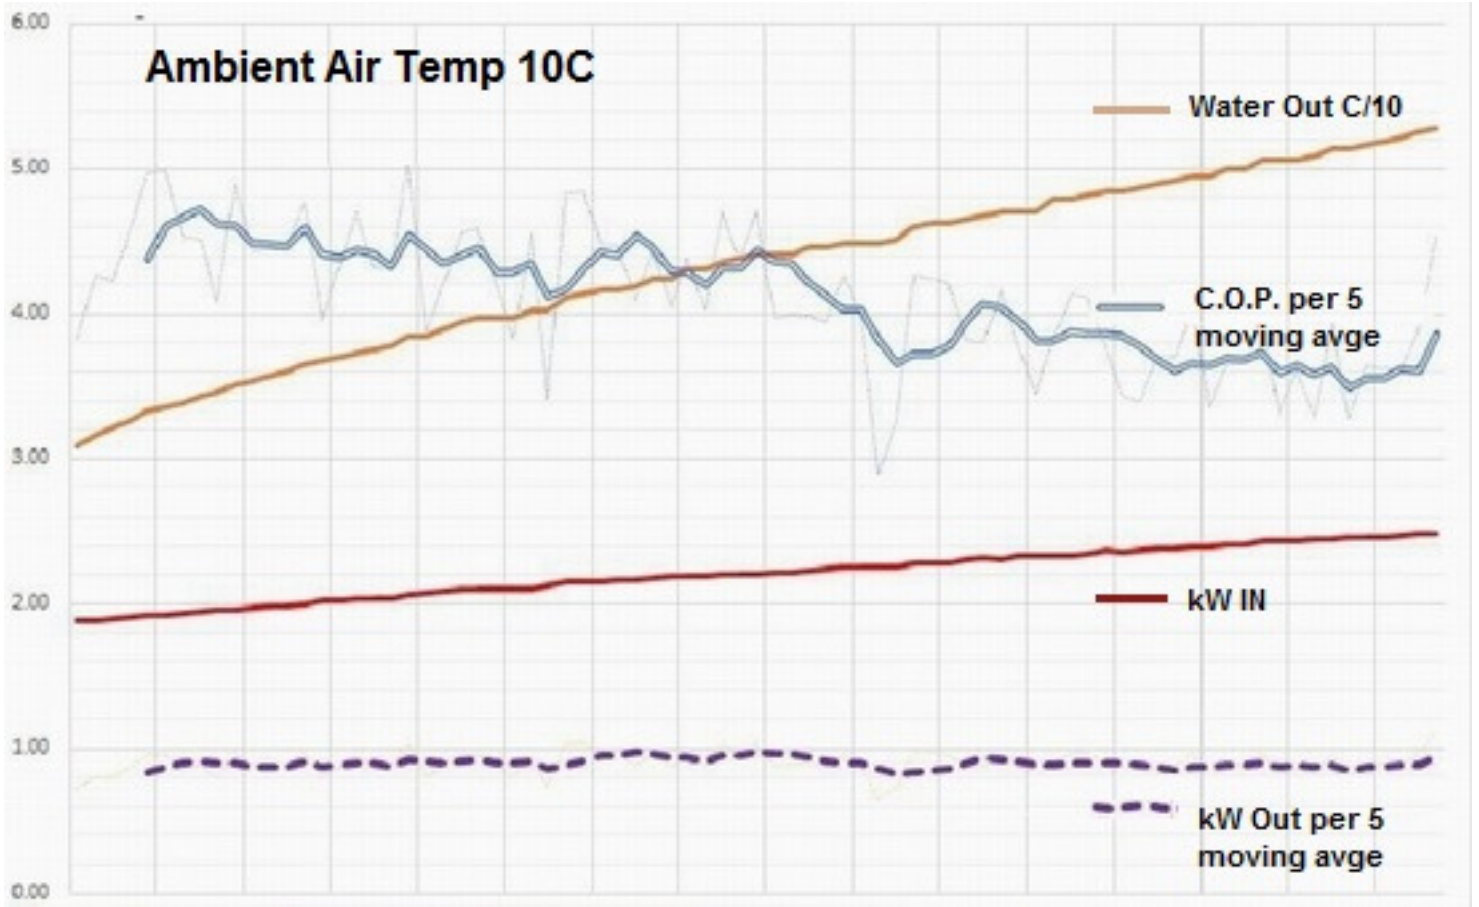

As you can see from the SX-13CCZA performance graph above, the Coefficient Of Performance is around 4.5 at slab heat temp of 45C, and well over 3.5 at radiator setting of 55C.

We believe our Hydrocarbon SX-13CCZA is one of - if not THE most efficient hydronic heatpump available anywhere!

As our in-house research and development continues, the efficiency and production quality of our dedicated air-sourced hydrocarbon-charged hydronic heatpumps continues to keep Skyline Energy the leader in our field.

... "let us exceed your expectations"

Insist on the best

- ask your local hydronic installer to include a Skyline Energy ZA model Hydrocarbon Hydronic Heatpump to drive your heating system!

1300 552 976

website: www.skylineenergy.com.au

email: info@skylineenergy.com.au